


Click to
ORDER
samples

AMSROL10-NZ

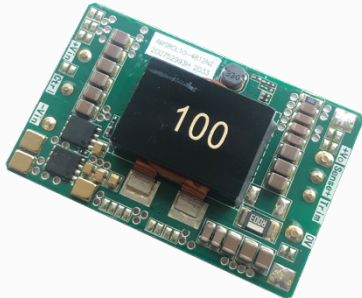

Open frame


Aimtec's AMSROL10-NZ series are non-isolated DC-DC converters with a 10A output current and wide input voltage range of 16-75VDC. They feature efficiency up to 97%, operating temperature of -40°C ~ +85°C, input under-voltage, output short-circuit & over-current protection.

The AMSROL10-NZ meets CLASS A of CISPR32/EN55032 emissions standards by adding the recommended external components. These models are widely used in applications such as battery powered systems and robotic field with a large fluctuation in a battery voltage & motor interference.

Features

- Input Range: 16VDC – 75VDC
- Operating Temp: -40 °C to +85 °C
- Low ripple & noise, up to 220mV(p-p) max.
- Efficiency up to 97%
- Adjustable output voltage
- Input under-voltage, output short circuit, over current protection
- Regulated single output

Summary

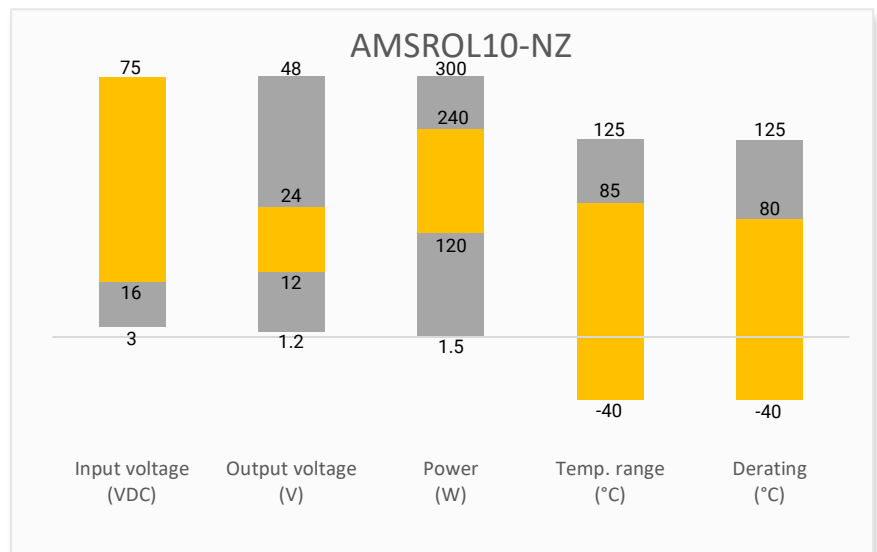

Training



Product Training Video
(click to open)



Press Release

Coming Soon!

Application Notes

Applications



Power Grid



Industrial



Telecom



Instrumentation

Models & Specifications

Single Output

| Model | Input Voltage (VDC) | Output Voltage (VDC) | Maximum Input Current (Nominal input voltage) (mA) | | Output Current Max (A) | Maximum Capacitive Load (μF) | Efficiency (%) Full Load Typ. |
|-----------------|---------------------|----------------------|----------------------------------------------------|-----------|------------------------|------------------------------|-------------------------------|
| | | | No Load | Full Load | | | |
| AMSROL10-4812NZ | 48 (16 ~ 75) | 12 | 80 | 2718 | 10 | 5500 | 95 |
| AMSROL10-4824NZ | 48 (30 ~ 75) | 24 | 80 | 5320 | 10 | 3300 | 97 |

Input Specification

| Parameters | Conditions | Typical | Maximum | Units |
|---------------------------------------------------------------------|---------------------------|------------------------------------------|---------|----------|
| Voltage range | See models table | | | VDC |
| Filter | Capacitance filter | | | |
| Absolute maximum rating | 1 sec. max | | 80 | VDC |
| Reflected ripple current | Nominal input voltage | 200 | | mA pk-pk |
| Start-up voltage | Nominal 12V output model | | 16 | VDC |
| | Nominal 24V output model | | 30 | VDC |
| Under voltage protection | Nominal 12V output model | 14 | | VDC |
| | Nominal 24V output model | 27 | | VDC |
| Adjustable input starting/under voltage (Refer to design reference) | Nominal 12V output model, | ≥16 | 75 | VDC |
| | Nominal 24V output model | ≥30 | 75 | VDC |
| Ctrl * | Module ON | Ctrl pin open or pulled high (1.5~12VDC) | | |
| | Module OFF | Ctrl pin pulled low to GND (0~0.8VDC) | | |
| | Input current when OFF | 2 | 10 | mA |

* The Ctrl pin voltage is referenced to input GND.

Output Specification

| Parameters | Conditions | Typical | Maximum | Units |
|------------------------------|-----------------------------------------------|---------|---------|----------|
| Voltage accuracy | 0 ~ 100% load | ±1 | ±3 | % |
| Line regulation | Full load, LL - HL | ±0.1 | ±0.5 | % |
| Load regulation | 5 ~ 100% load | ±0.3 | ±2 | % |
| Over current protection | | 130 | 190 | % Iout |
| Short circuit protection | Continuous, Auto recovery | | | |
| Temperature coefficient | Full load | | ±0.03 | %/ °C |
| Ripple & Noise* | 20MHz bandwidth | 150 | 220 | mV pk-pk |
| Trim | | | ±10 | % Vout |
| Transient recovery time | 25% load step change | 200 | 500 | μS |
| Transient response deviation | 25% load step change | ±4 | ±5 | % |
| Sense | Refer to remote sense application for details | | 105 | % Vout |

| General Specifications | | | | |
|------------------------|-----------------------------------------------------|-------------|---------|-------|
| Parameters | Conditions | Typical | Maximum | Units |
| Switching frequency | Nominal 12V output model | 200 | | KHz |
| | Nominal 24V output model | 250 | | KHz |
| Operating temperature | See derating graph | -40 to +85 | | °C |
| Storage temperature | | -55 to +125 | | °C |
| Soldering temperature | Wave soldering, maximum duration 10 sec | | 260 | °C |
| Cooling | Nature convection or forced convection | | | |
| Humidity | Non-condensing | | 95 | % RH |
| Vibration | 10-150Hz, 5G, 0.75mm, 90min, along X, Y and Z | | | |
| Weight | | 33 | | g |
| Dimensions (L x W x H) | 2.33 x 1.48 x 0.51 inches (59.20 x 37.60 x 13.00mm) | | | |
| MTBF | > 1 000 000 hrs (MIL-HDBK -217F, t=+25°C) | | | |

| Safety Specifications | | |
|-----------------------|------------------------------------------|--------------------------------------------------------------|
| Parameters | | |
| Standards | EMC - Conducted and radiated emission | CISPR32/EN55032, CLASS A with recommended circuit |
| | Electrostatic Discharge Immunity | IEC 61000-4-2 Contact \pm 6KV, Criteria B |
| | RF, Electromagnetic Field Immunity | IEC 61000-4-3 10V/m, Criteria A |
| | Electrical Fast Transient/Burst Immunity | IEC 61000-4-4 \pm 2KV, Criteria A with recommended circuit |
| | Surge Immunity | IEC 61000-4-5 \pm 2KV, Criteria B with recommended circuit |
| | RF, Conducted Disturbance Immunity | IEC 61000-4-6 10Vr.m.s, Criteria A |


Derating



12V output model


$$16V \leq V_{in} \leq 48V$$

Nature convection or forced convection

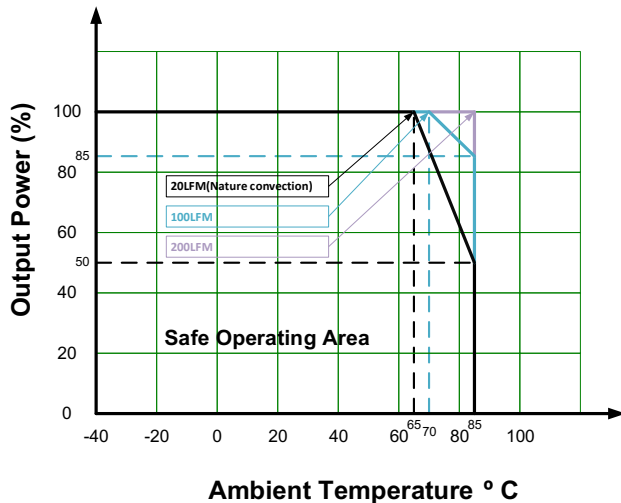


$$48V \leq V_{in} \leq 55V$$

Nature convection or forced convection

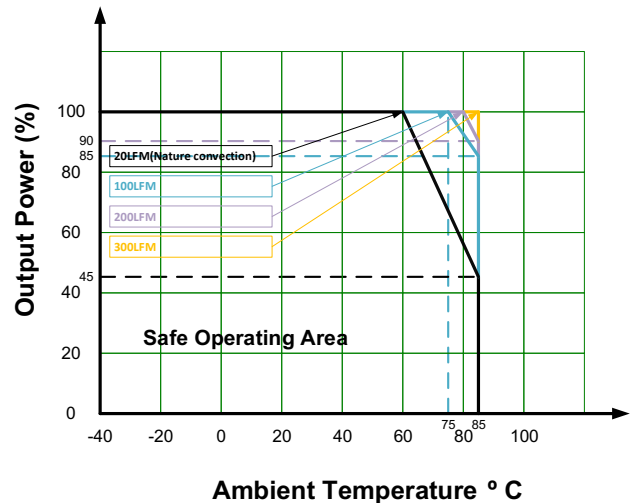

55V ≤ Vin ≤ 75V


Nature convection or forced convection

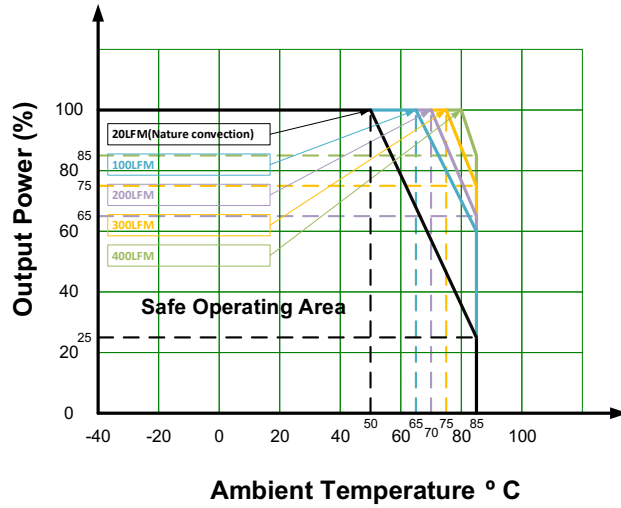

24V output model


30V ≤ Vin ≤ 48V


Nature convection or forced convection

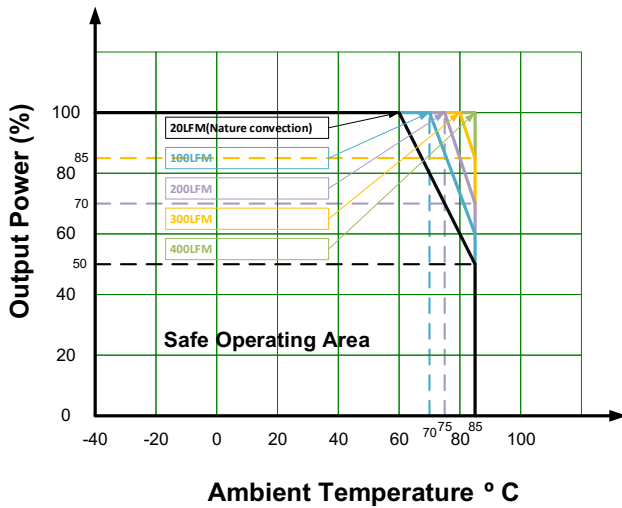

48V ≤ Vin ≤ 55V

Nature convection or forced convection

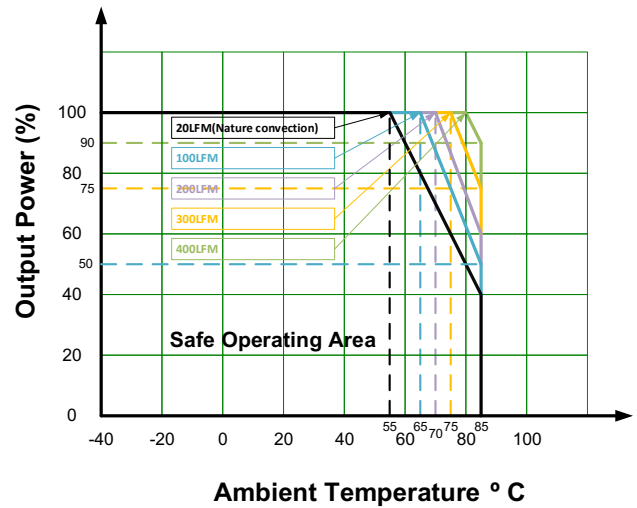


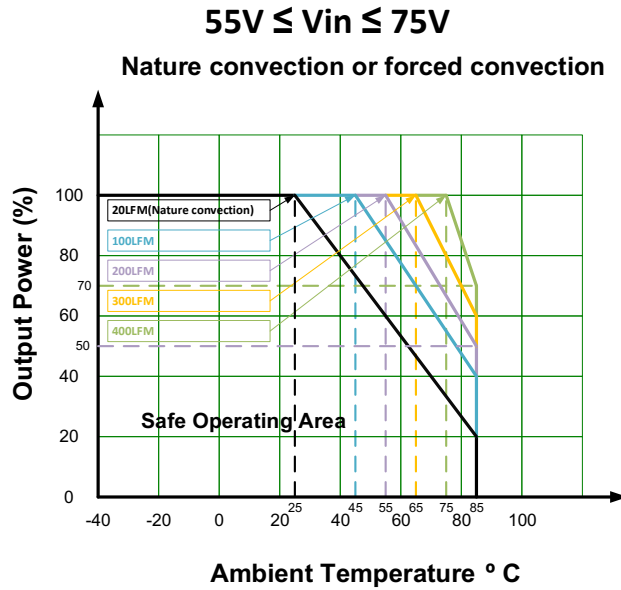

Remote Sense Application




Remote sense connection if not used

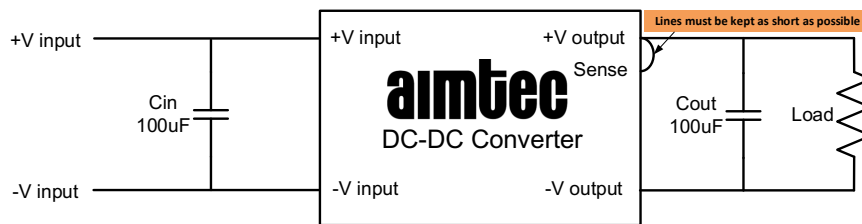

Notes:

1. Sense must be connected to +Vo at the DC-DC switching regulator if it is not used for remote regulation.
2. To avoid picking up noise, interference and/or cause unstable operation of the regulator, the connection between Sense and +Vo must be as short as possible.


Remote sense connection used for compensation

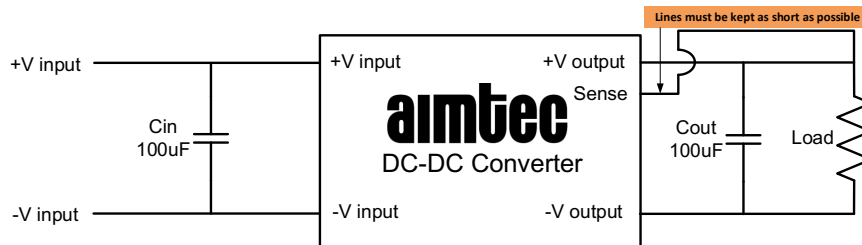

Notes:


1. Using long remote sense wire may cause unstable output, please contact technical support if long sense wires must be used.
2. Please ensure adequate cross section for PCB-trace and/or cables connecting the power supply module to the load to keep the voltage drop below 0.3V and make sure the power supply's output voltage remains within the specified range.
3. Large wire impedance may cause oscillation of the output voltage and/or increased ripple. Consult technical support or factory for further advice of sense operation.

Typical Application Circuit


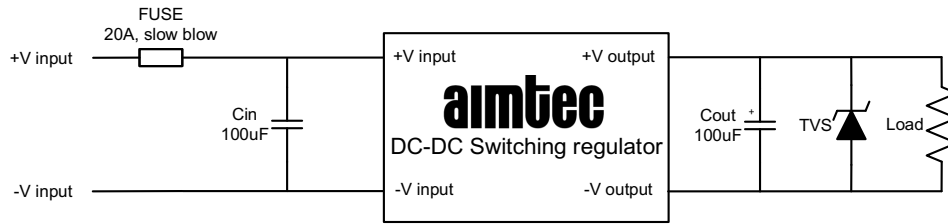


TVS : SMDJ14A (12V output model) / SMDJ28A (24V output model).

EMC Recommended Circuit

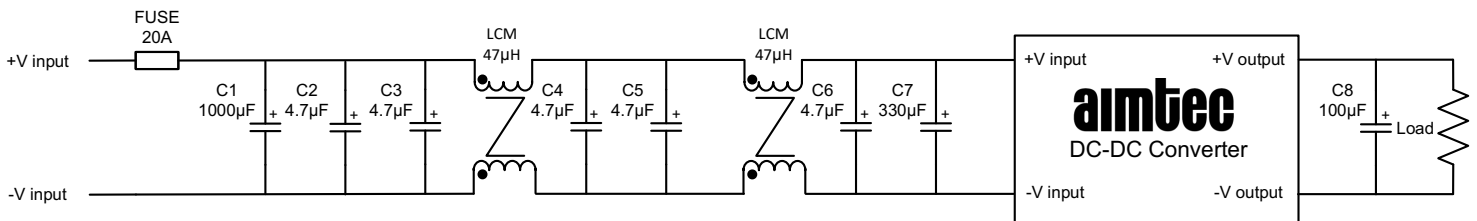

Dimensions

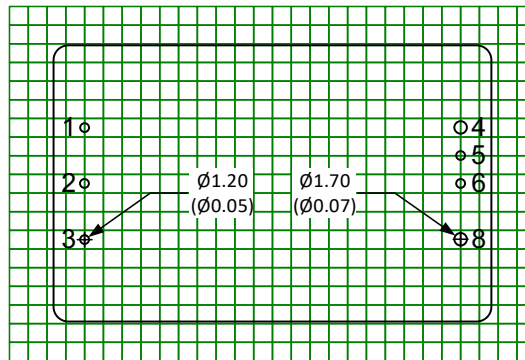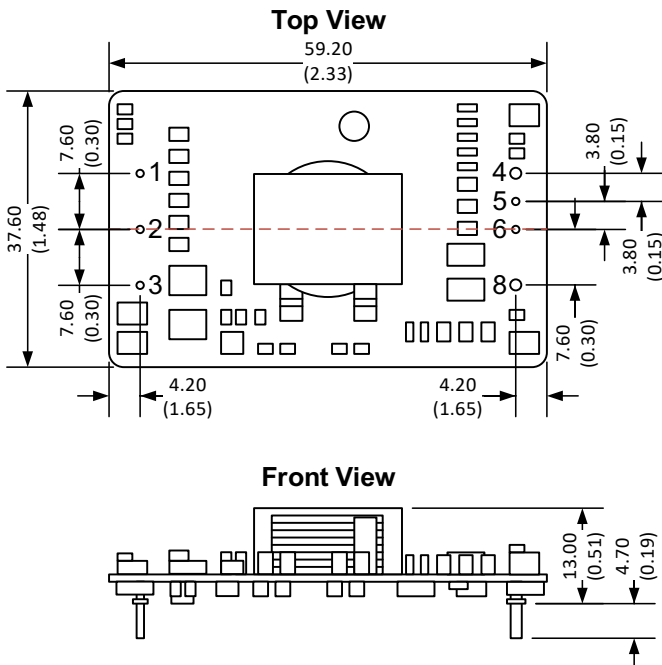

Note : Grid 2.54*2.54 mm

| Pin Out Specifications | |
|------------------------|-----------|
| Pin | Single |
| 1 | +V Input |
| 2 | Ctrl |
| 3 | -V Input |
| 4 | +V Output |
| 5 | Sense |
| 6 | Trim |
| 8 | -V Output |

Notes:

All dimensions are typical in millimeters (inches).

Pin 1,2,3,5,6 diameter : 1.0 (0.04)

Pin 4,8 diameter : 1.5 (0.06)

Pin diameter tolerance : ±0.1 (±0.004)

Stand-off tolerance ±0.50 (±0.02)


Trimming



Output voltage can be externally trimmed by utilizing the methods as shown below

Fixed Resistor

Variable Potentiometer

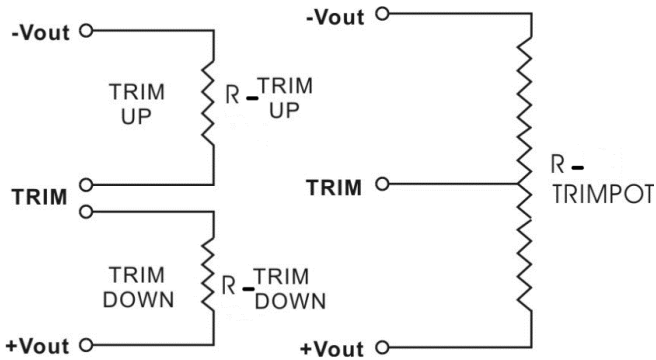

Leave open if not used.


AMSROL10-4812NZ

| Trim down % | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|--------------|-----------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Vout (VDC) | 11.880 | 11.760 | 11.640 | 11.520 | 11.400 | 11.280 | 11.160 | 11.040 | 10.920 | 10.800 |
| Rt down (KΩ) | 22228.051 | 12632.653 | 8742.977 | 6636.153 | 5314.955 | 4409.004 | 3749.121 | 3247.040 | 2852.201 | 2533.562 |
| Trim up % | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (VDC) | 12.120 | 12.240 | 12.360 | 12.480 | 12.600 | 12.720 | 12.840 | 12.960 | 13.080 | 13.200 |
| Rt up (KΩ) | 3336.021 | 1224.275 | 714.417 | 484.966 | 354.489 | 270.308 | 211.497 | 168.087 | 134.731 | 108.297 |

AMSROL10-4824NZ

| Trim down % | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|--------------|-----------|-----------|-----------|----------|----------|----------|----------|----------|----------|----------|
| Vout (VDC) | 23.760 | 23.520 | 23.280 | 23.040 | 22.800 | 22.560 | 22.320 | 22.080 | 21.840 | 21.600 |
| Rt down (KΩ) | 31665.034 | 15574.887 | 10232.492 | 7565.213 | 5966.097 | 4900.540 | 4139.683 | 3569.180 | 3125.538 | 2770.676 |
| Trim up % | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (VDC) | 24.240 | 24.480 | 24.720 | 24.960 | 25.200 | 25.440 | 25.680 | 25.920 | 26.160 | 26.400 |
| Rt up (KΩ) | 1002.593 | 457.394 | 274.952 | 183.598 | 128.743 | 92.155 | 66.011 | 46.399 | 31.143 | 18.936 |

Adjustable input Starting/Under Voltage and Resistor calculation

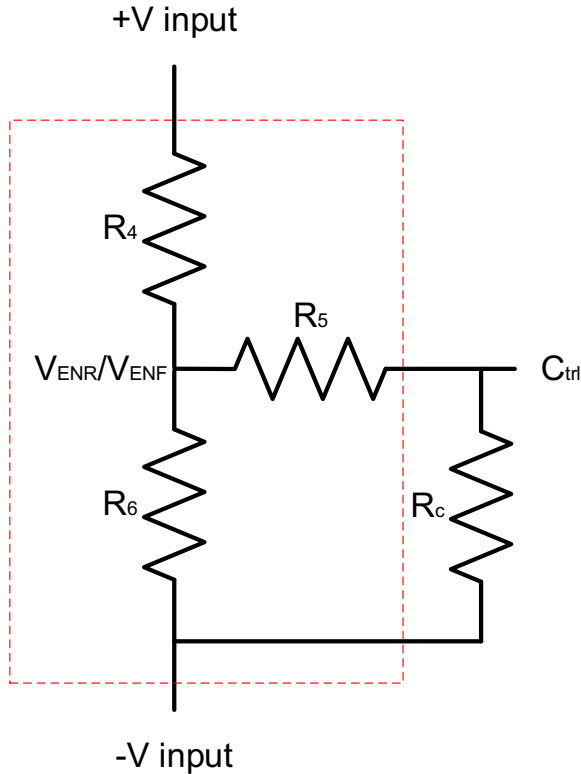

Calculation resistor of Adjustable input Starting (Under-voltage) Voltage:

$$R_c = \frac{bR_5}{R_5 - b} - R_6 \quad b = \frac{V_{EN}}{V_{in} - V_{EN}} \times R_4$$

R_c : resistor of Adjustable input Starting (Under-voltage) Voltage
 b : self-defined parameter

When $V_{EN} = V_{ENR}$, V_{in} is actual starting voltage required for input
 When $V_{EN} = V_{ENF}$, V_{in} is actual under-voltage required for input

Adjustable input Starting/Under Voltage resistor connection
 (dashed line shows internal resistor network)

| Vout(VDC) | R4(KΩ) | R5(KΩ) | R6(KΩ) | VENR(V) | VENF(V) |
|-----------|--------|--------|--------|---------|---------|
| 12 | 100 | 8.93 | 0.1 | 1.22 | 1.09 |
| 24 | 100 | 4.32 | 0.1 | 1.22 | 1.09 |

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.