



FEATURES:

- Accurate Constant Current Output $\pm 5\%$
- High Efficiency: Up to 92%
- Active Power Factor Correction
- UVLO, Open Circuit Protection
- IP65/IP67 design for indoor/outdoor
- Short Circuit Protection
- Over Temperature Protection
- 5 Year Warranty



Models
Single output

| Model | Max Output Power (W) | Output Voltage Range (V) | Output Current (mA) | Input Voltage (VAC/Hz) | Efficiency (%) |
|-----------------|----------------------|--------------------------|---------------------|------------------------|----------------|
| AMER160-48320Z* | 153.6 | 15-48 | 3200 | 90-305/47-63 | 92.0 |
| AMER160-55290Z | 159.5 | 30-55 | 2900 | 90-305/47-63 | 92.0 |
| AMER160-48340Z* | 163.2 | 15-48 | 3400 | 90-305/47-63 | 92.0 |

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity <75%, nominal input voltage and at rated output load unless otherwise specified.

Input Specifications

| Parameters | Conditions | Typical | Maximum | Units |
|---------------------|---------------------|---------|---------|-------|
| Input Current | 90 VAC, full load | | 2.4 | Arms |
| Inrush current <2ms | 115 VAC, cold start | | 40 | A |
| | 305 VAC, cold start | | 65 | |
| Leakage current | | | 0.75 | mA |
| Input dissipation | No Load | | 3.0 | W |
| | Output Short | | 5.0 | W |
| Power Factor | 115 VAC, full load | | 0.98 | |
| | 277 VAC, full load | | 0.92 | |
| Input Fuse | 5A/300V | | | |
| Start-up Time | 115 VAC, full load | | 1.0 | Sec. |
| | 277 VAC, full load | | 1.0 | Sec. |

Output Specifications

| Parameters | Conditions | Typical | Maximum | Units |
|-----------------------|--|---------|---------|-------|
| Current accuracy | | ± 5 | | % |
| Line regulation | LL to HL | ± 1 | | % |
| Load regulation | Full Output Voltage Range | ± 5 | | % |
| Ripple & Noise | | | 200 | mV |
| Output Current Ripple | Full load | | 1.0 | Io% |
| Current Overshoot | LL to HL, full load at cold start, % of rated output current | | 10 | % |
| Hold-up time (min.) | | 10 | 15 | ms |
| Minimum Load Voltage | See Models Table Above | | | |

Isolation Specifications

| Parameters | Conditions | Typical | Rated | Units |
|------------------------------|-------------------|----------------|-------|-------|
| Tested I/O Isolation Voltage | I/P – O/P | | 3750 | VAC |
| | I/P – FG | | 2000 | VAC |
| | O/P – FG | | 500 | VAC |
| Isolation Resistance | I/P – O/P, 500Vdc | >100M Ω | | Vdc |
| Isolation Capacitance | | 3000 | | pF |

General Specifications

| Parameters | Conditions | Typical | Maximum | Units |
|--------------------------|-------------------------|---------|---------|-------|
| Switching frequency | | 100 | 220 | KHz |
| Over voltage protection | | | 63 | V |
| Short circuit protection | Continuous current mode | | | |

| | | | |
|-----------------------------|---|------------|--------|
| Short circuit restart | Auto Recovery | | |
| Open circuit protection | Continuous voltage mode | | |
| Over Temperature Protection | Threshold – Shutdown Output | +110 | °C |
| | Hysteresis – Auto Recovery | +85 | °C |
| Operating temperature | With Derating over 60°C | -40 to +70 | °C |
| Maximum case temperature | | 90 | °C |
| Storage temperature | | -40 to +85 | °C |
| Temperature coefficient | | 0.03 | % / °C |
| Cooling | Free Air Convection | | |
| Humidity | | 90 | % RH |
| Case material | Metal (Aluminum) | | |
| Potting material | polysiloxane | | |
| IP Rating | IP67 | | |
| Weight | | 1100 | g |
| Dimensions (L X W X H) | 9.02 x 2.68 x 1.53 Inches, 229.0 x 68.0 x 38.8 mm | | |
| MTBF | >450,000 hrs (MIL-HDBK-217F at +25°C) | | |

Safety Specifications

Parameters


| | | |
|------------------|---|--|
| Agency Approvals | NOM (for all part numbers with *) | |
| Standards | Electromagnetic Interference | EN55015 / FCC Part 15, Class B |
| | Harmonic Current Emissions | EN61000-3-2, Class B |
| | Voltage fluctuations and flicker | EN61000-3-3 |
| | Electrostatic Discharge Immunity | EN61000-4-2, 8kV Air, 4kV Contact, Level 3, Criteria A |
| | RF, Electromagnetic Field Immunity | EN61000-4-3, Test-RS Level 3, Criteria A |
| | Electrical Fast Transient / Burst Immunity | EN61000-4-4, Burst EFT Level 3, Criteria A |
| | Surge Immunity | EN61000-4-5, Line to Neutral 4kV, Line/Neutral to FG 6kV |
| | RF, Conducted Disturbance Immunity | EN61000-4-6, Test-CS Level 3, Criteria A |
| | Power frequency Magnetic Field Immunity | EN61000-4-8, Test 3A/m, Criteria A |
| | Voltage dips, Short Interruptions Immunity | EN61000-4-11, Criteria B |
| | Electromagnetic Immunity Requirements Applies to Lighting Equipment | EN61547 |

Pin Definition

| Wire | Connection |
|--------------|------------|
| Brown | AC L |
| Blue | AC N |
| Yellow/Green | FG |
| Red | +V Output |
| Black | -V Output |


Input wire gauge #18
Output wire gauge #14

Application circuit

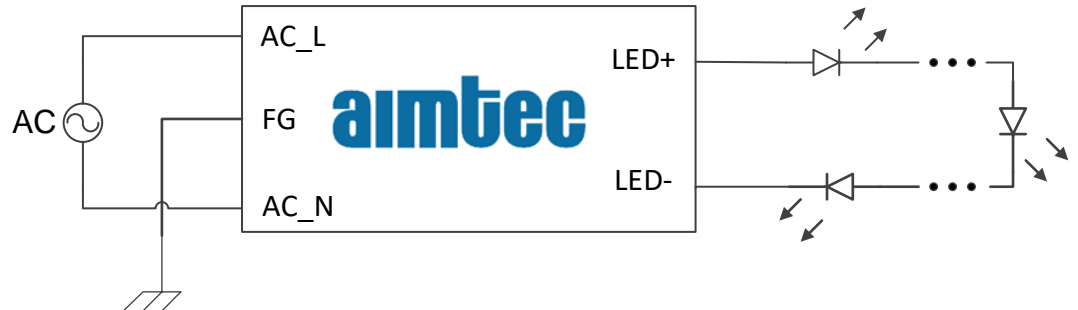


Dimensions

Top View

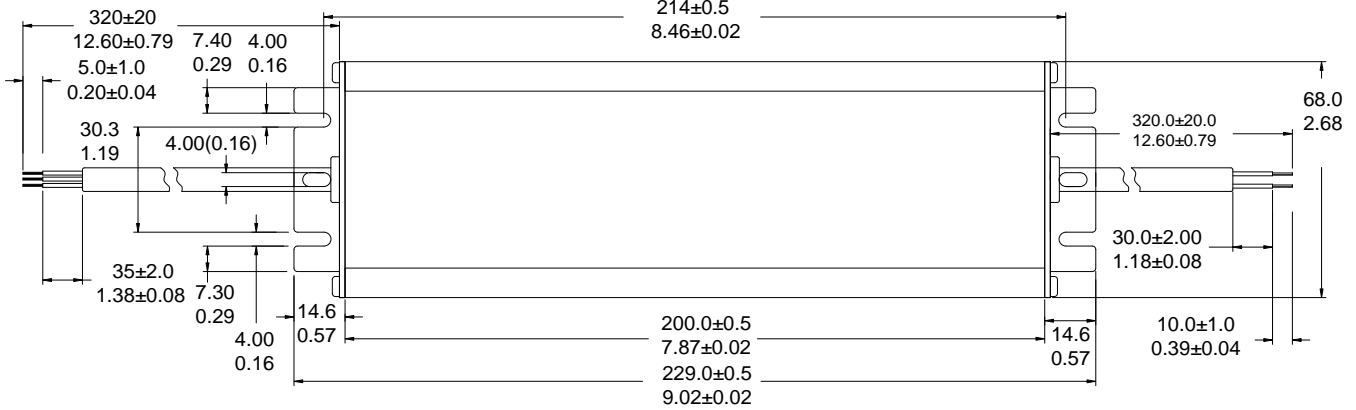


Side View

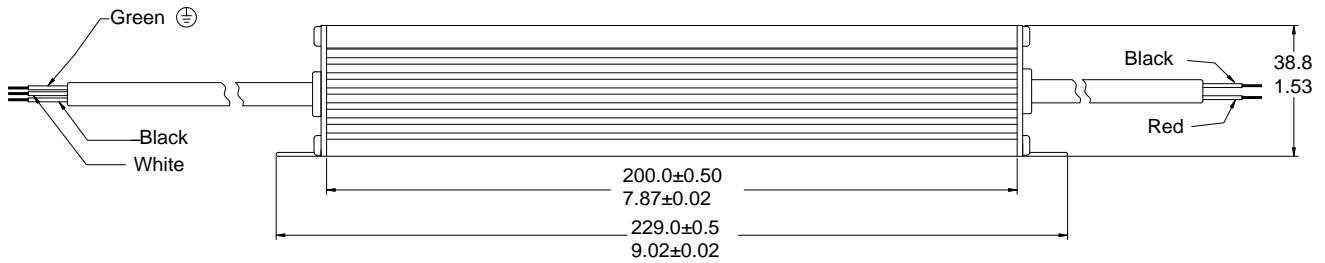


Derating

Free Air Convection

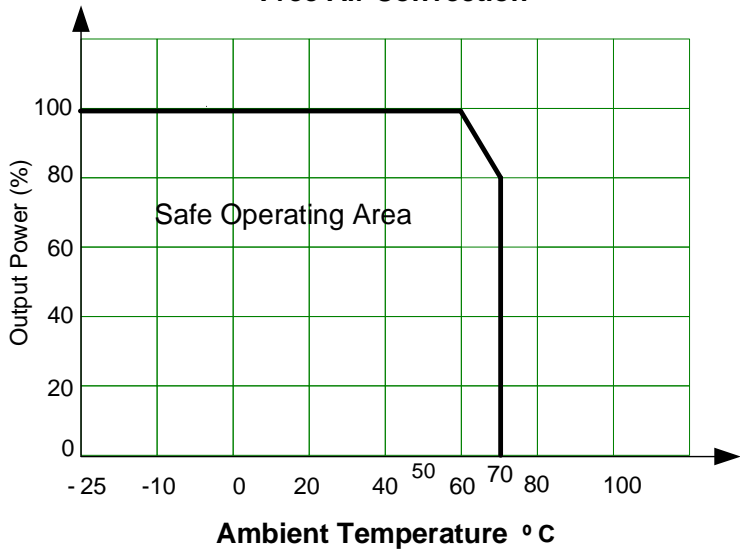


Efficiency Vs. Input Voltage & Output Voltage (Constant current load)


AMER160-48320Z

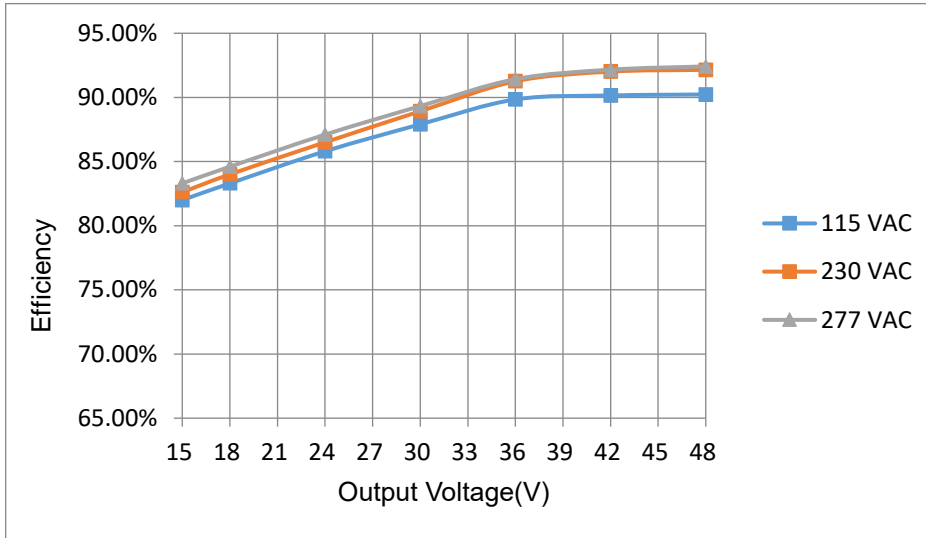

AMER160-55290Z

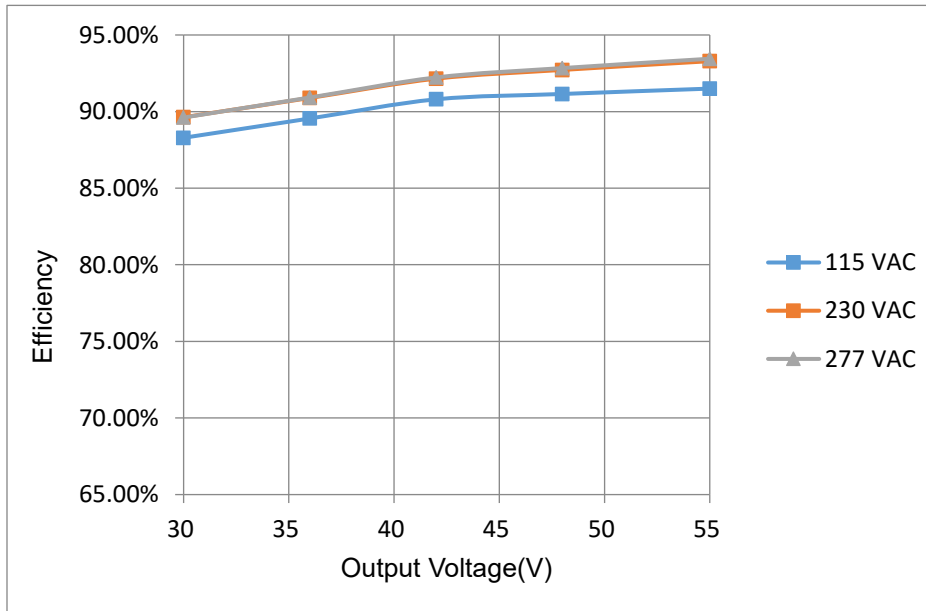


AMER160-48340Z

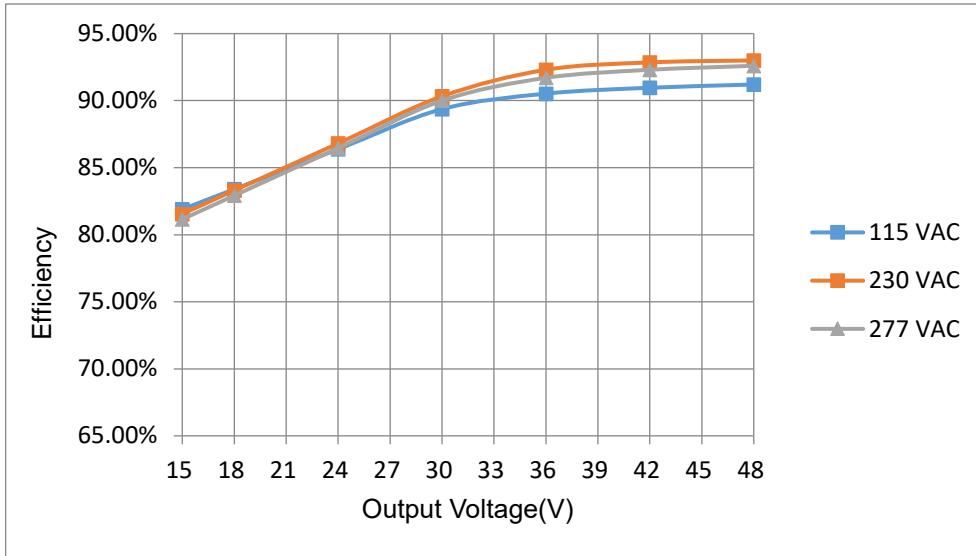


PF vs. Input Voltage & Output Voltage (constant current mode)


AMER160-48320Z

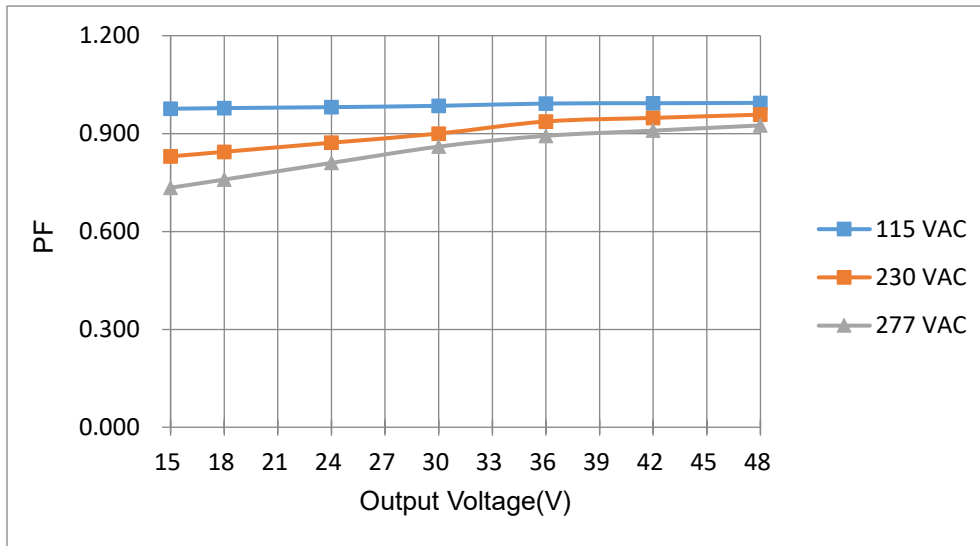

AMER160-55290Z

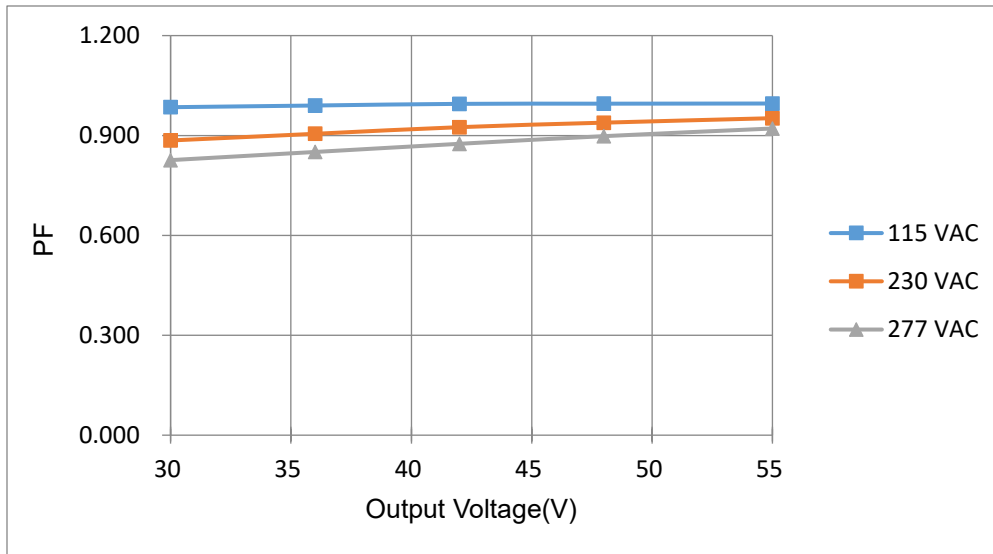

AMER160-48340Z

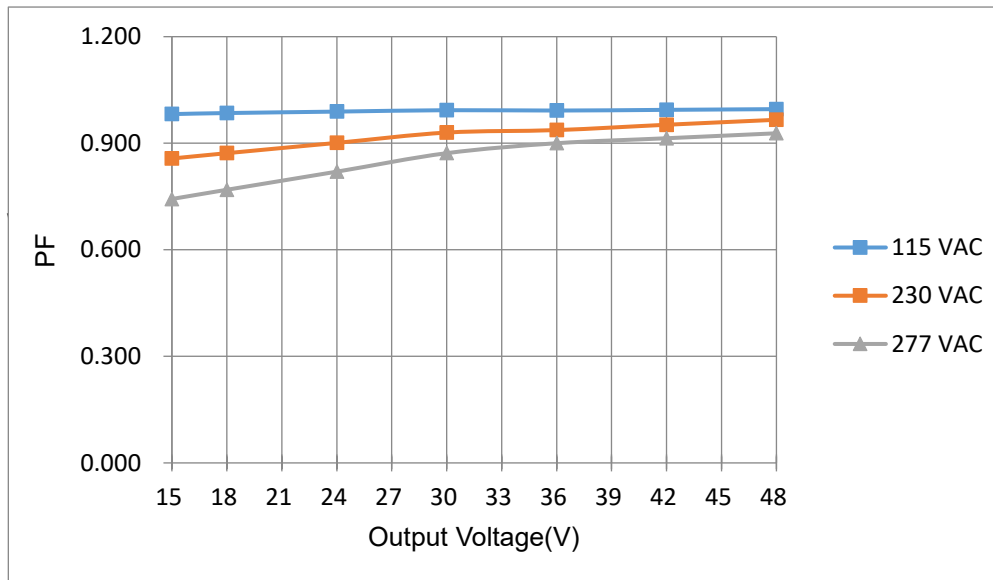

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.